

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)


PCT

(10) International Publication Number
WO 2004/013463 A1

- (51) International Patent Classification⁷: **E21D 20/02**
- (21) International Application Number:
PCT/AU2003/000967
- (22) International Filing Date: 1 August 2003 (01.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002950558 2 August 2002 (02.08.2002) AU
2002953569 24 December 2002 (24.12.2002) AU
- (71) Applicant (for all designated States except US): **DY-WIDAG-SYSTEMS INTERNATIONAL PTY LIMITED** [AU/AU]; 25 Pacific Highway, Bennett's Green, NSW 2290 (AU).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **RATAJ, Mieczyslaw**, Stanislaw [AU/AU]; 42 Powell Street, Charlestown, NSW 2290 (AU). **LANGWADT, Otmar** [DE/DE]; Adalbert-Stifter-Weg 17, 85570 Markt Schwaben (DE).
- (74) Agent: **SPRUSON & FERGUSON**; GPO Box 3898, Sydney, NSW 2001 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **ROCK BOLT POST GROUTING APPARATUS**

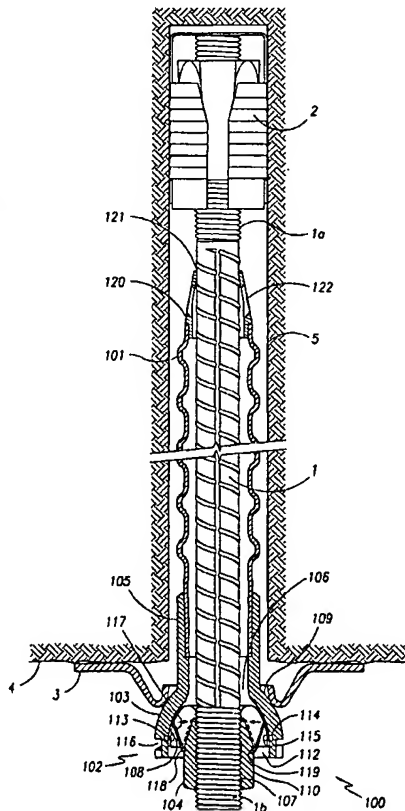

(57) Abstract: An apparatus (100) for post-grouting a rock bolt (1) has an elongate sleeve (101) adapted to receive a rock bolt (1) with a first end (1a) thereof extending beyond the sleeve first end (101a) and a second end (1b) thereof extending beyond the sleeve second end (101b). An end fitting (102) is attached to the sleeve second end (101b) and has a central aperture (106, 107) for receiving the rock bolt (1). Grout passages (112) communicate the exterior of the end fitting (102) with the interior of the sleeve (101). A seal means (117) is displaceable between open and closed positions so as to seal the grout passages (112). The seal means (117) is biased towards the closed position at which the grout passages (112) are substantially sealed. Injection of grout into the end fitting (102) via the passages (112) deflects the seal means (117) to the open position enabling flow of grout through the passages (112) and into the sleeve (101).



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*